









Li-Ion Battery & Charger Time Reference, Compatibility Chart

18V Lithium-ion		DC18RC Fast Charger	DC18SE Automotive Charger	DC18RD Two Port Multi Fast Charger
6.0 Ah	 BL1860B (197422-4) *BL1860B with Battery Fuel Gauge*	WITH DC18RC 55 min. Fast Charging	WITH DC18SE 130 min.	 SAME CHARGING TIME AS WITH DC18RC.
5.0 Ah	 BL1850B (197280-8) *BL1850B with Battery Fuel Gauge*	45 min. Fast Charging	110 min.	
3.0 Ah	 BL1830B (197599-5) *BL1830B with Battery Fuel Gauge*	22 min. Fast Charging	60 min.	No discharging required 
1.5 Ah	 BL1815N (632A54-1)	15 min. Fast Charging	30 min.	Shock Absorbing Heavy Duty Pack  Longtime Storage Low Self Discharge 


710%

Extreme Stamina Life time work volume **(5.0Ah)**

The figure is a relative value when the amount of Ni-Cd 1.9Ah is indexed at 100.



40% Lighter

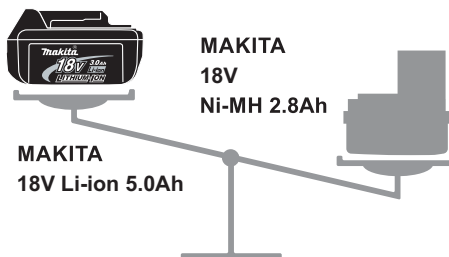

Firm Holding

Multi-contact terminals reduce electrical resistance and increase connection stability withstanding against vibration, and ultimately ensures stable current supply to the tool.

